





**Design for harsh industrial environments
 stable and reliable**

- ✓ Industrial Level 4
- ✓ IP40 protection
- ✓ CE,FCC certificated
- ✓ Anti-EMI



10/100/1000M Managed Industrial Ethernet Switches

LV-GY204

Introduction	Image
<p>This managed industrial Ethernet switch is designed to match the critical industrial standards. With reliable and simple operation against vibration and shock, and wide operation temperature range, it could match a variety of harsh environments.</p> <p>The switch complies with CE, FCC and RoHS standards, and passed the 100% burning test to ensure that it will fulfill the needs of industrial applications. It is a good choice for an economical solution for industrial Ethernet connections.</p>	 

Features & Benefits
4 10/100Base-T(X) ports and 2 1000Base-X ports
“OP-Ring” (recovery time<20ms), RSTP/STP, and MSTP for network redundancy
SNMPv3, iieee802.1X, HTTPS and SSH to enhance network security
Port-based VLAN, IEEE802.1Q VLAN and GVRP to ease network planning
DHCP Option 82 for IP address assignment with different policies
Ethernet/IP and Modbus/TCP industrial Ethernet protocol supported
Bandwidth management prevents unpredictable network status
RMON for efficient network monitoring and proactive capability
Lock port allows access by only authorized MAC addresses
Port mirroring for online debugging
Automatic warning by exception through email, relay output
QoS and ToS/DiffServ for flow control and management



**Design for harsh industrial environments
 stable and reliable**

- ✓ Industrial Level 4
- ✓ IP40 protection
- ✓ CE, FCC certificated
- ✓ Anti-EMI



IEEE 802.3ad, LACP for optimum bandwidth utilization
Configurable by CLI for advanced management function
-40°C to +85°C operating temperature range

Physical Characteristics
Housing: Aluminum Alloy material with IP40 Protection
Dimension: 138mm(L) X 112mm(W) X 60mm(H)
Weight: 710g
Installation: Din-Rail mounting, Wall mounting

Switch Properties
Priority Queues: 4
Maximum No of Available VLANs: 256
VLAN ID: 1-4094
IGMP Groups: 256
MAC Table Size: 8K
Packet Buffer Size: 1M bit

Interfaces
SFP Port: 1000Base-X interface
RJ45 Port: 10/100Base-T(X) auto negotiation
Console Port: RS-232(RJ45 connector)
Alarm Contact: 1 replay outputs, supports IP/MAC conflict

Power
Input Voltage: 24V DC(18-36VDC) Redundant dual inputs
Input Current: <0.5A @24VDC



**Design for harsh industrial environments
 stable and reliable**

- ✓ Industrial Level 4
- ✓ IP40 protection
- ✓ CE,FCC certificated
- ✓ Anti-EMI



Overload Current Protection: Present
Reverse Polarity Protection: Present
Redundant Protection: Present
Connection: 1 removable 6-pin terminal blocks

Environmental Limits
Operating Temperature: -40°C to +85°C
Storage Temperature: -40°C to +85°C
Ambient Relative Humidity: 5% to 95% (non-condensing)

Technology
Protocol: OP-Ring, IGMPv1/v2, GVRP, SNMPv1/ v2C/ v3, DHCP Client, TFTP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, SSH, SNMP Inform, LLDP, SNT Service/ Client, PVLAN
MIB: MIB-II, Ethernet-Like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, Bridge MIB, RSTP MIB, RMON MIB Group 1,2,3,9
Flow Control: IEEE 802.3x flow control, back pressure flow control


Standards
IEEE 802.3 for 10BaseT
IEEE 802.3u for 100BaseT(X)
IEEE 802.3x for Flow Control
IEEE 802.1D-2004 for Spanning Tree Protocol
IEEE 802.1w for Rapid Spanning Tree Protocol
IEEE 802.1Q for VLAN Tagging
IEEE 802.1p for Class of Service
IEEE 802.1X for Authentication
IEEE 802.3ad for Port Trunk with LACP



EMS:
EN61000-4-2 (ESD), Level 3
EN61000-4-3 (RS), Level 3
EN61000-4-4 (EFT), Level 3
EN61000-4-5 (Surge), Level 3
EN61000-4-6 (CS), Level 3
EN61000-4-16(Common-mode Conduction) , Level 3
Shock: IEC 60068-2-27
Free Fall: IEC 60068-2-32
Vibration: IEC 60068-2-6
EMI: FCC CFR47 Part 15, EN55022/CISPR22, Class A
Industry: IEC61000-6-2
Rail: EN50155, EN50121-4
Traffic: NEMA TS-2

Warranty
5 years

Dimension

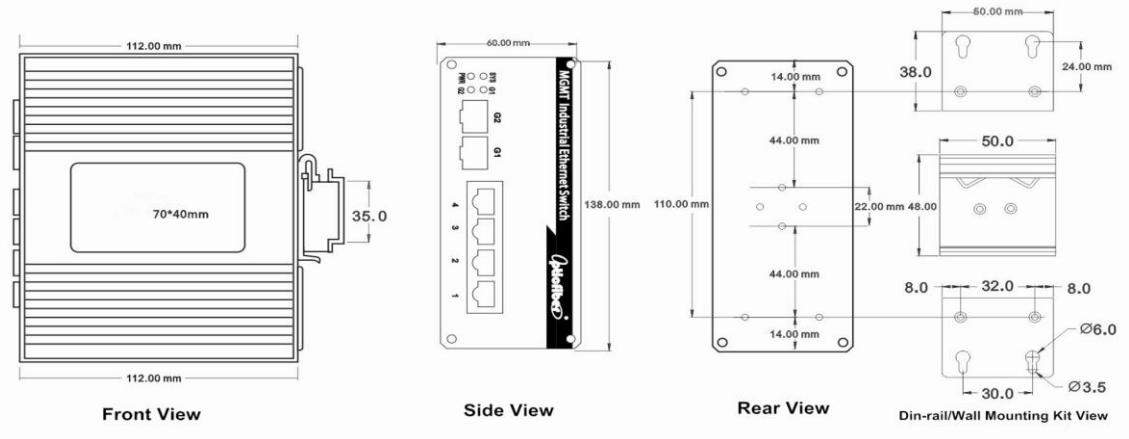

Design for harsh industrial environments stable and reliable

- ✓ Industrial Level 4
- ✓ IP40 protection
- ✓ CE,FCC certificated
- ✓ Anti-EMI



Models Available

Model No	Description
LV-GY204	2*1000M SFP Slot+4*10/100M RJ45 Port, 1 Console Port